

# BLUE ICE !

# MODEL T15

## Soft Serve Freezer

Single flavor, Countertop, Gravity feed,



### Product Offering

Offer all popular soft serve variations from low or non-fat ice cream to custards, yogurt and sorbet

### Freezing Cylinder

One, 1.7 Litre

### Mix Hopper

One, 8 Litres

Separate hopper refrigeration maintains mix temperature below 4.4°C (40°F) during Cool and Standby modes.

### Mix Low Indicator

When mix level is low, the Mix Low light turns "ON" to alert operator to add mix.

### Standby

Maintains product temperature in the mix hoppers and freezing cylinders below 4.4°C (40°F) during long no-use periods.

### Controls

Automatically regulates refrigeration by monitoring product viscosity to maintain consistent quality.

### Output

100 Cups/Hour  
(80 gram/cup at 4°C Liquid & 24°C Ambient)

CE

50 Hz.  
Models



Flexible blade beater (optional)  
Higher capacity, higher overrun




**Blue Ice Machines Ltd**  
38 Garman Road, London, N17 0UL  
Tel: 0208 801 6919  
www.blueicecreammachine.co.uk  
info@blueicecreammachine.co.uk

ISO 9001:  
REGISTERED FIRM

### Safety Protections

- Low temperature cutouts protect from cylinder over freezing.
- High pressure switch prevents compressor overheat
- Thermal overload protects from motor overheat

# MODEL T15

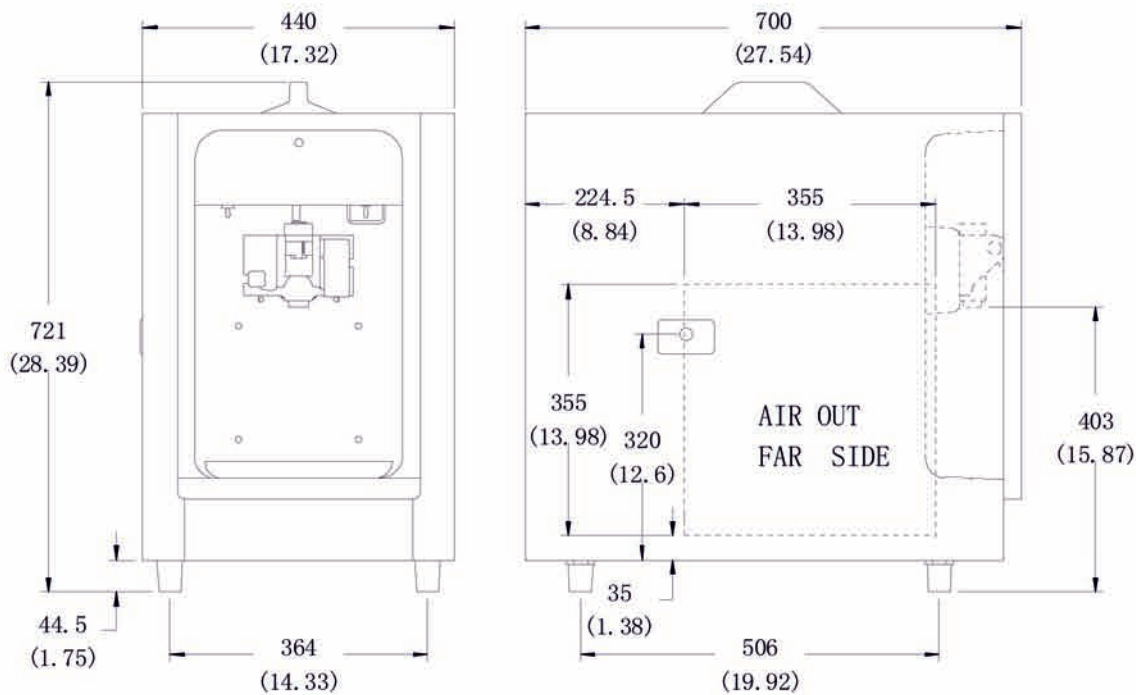

Weight	Kg/lb
Net	101/223
Shipping	113/249

<b>Packaging Volume</b>	0.34 CBM / 12.10 CBF
-------------------------	----------------------

Dimensions	Net (mm/in)	Shipping (mm/in)
Width	440 / 17.3	500 / 19.7
Depth	700 / 27.6	770 / 30.3
Height	721 / 28.4	890 / 35.0

Electrical	Maximum Fuse Size	Min. Circuit Ampacity	Poles (P) Wires (W)
220-240/50/1	12	8	3P/3W
208-230/60/1	15	10	3P/3W

*This unit may be manufactured in other electrical characteristics. Refer to the local distributor for availability. (For accurate electrical information, always refer to the data label of the unit.)*

**Note:** Continuing research will result in steady improvements. Therefore, these specifications are subject to change without notice.

## SPECIFICATIONS

### Electrical

One dedicated electrical connection is required. Unit shall be cord connected or permanently connected. Consult your local Blue Ice distributor for available cord & receptacle specifications as per local codes.

### Motor

One, 0.8HP

### Refrigeration System

Compressor: One, 3150 BTU/HR, R404A (BTUs may vary depending on compressor used.)

### Air Cooled

Minimum clearance of 152mm (6") on both sides is required to achieve optimum performance. The rear of the unit may be placed against a wall.

### Air Cooled

- ▲ Top Air Discharge Chute (air cooled only).
- ▲ Water Cooled.
- ▲ Local language Control systems: English, French, Spanish, German, Dutch, Czech, Chinese
- ▲ Cone dispenser